


To configure the IoT device, you must temporarily disable the Ethernet adapter if you have one. If it remains enabled, the T-One device will not be able to open the configuration page after it is connected. In that case, you must open your browser and enter the following address to open the configuration:


<http://100.100.50.1>

To disable the adapter, go to Network connections or simply **disconnect the cable from the port**.

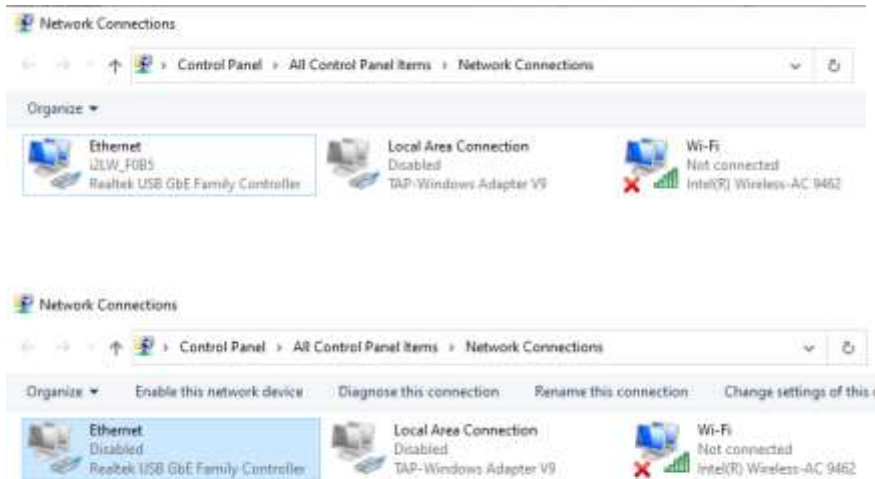

Connect to the device's Wi-Fi to configure it. You can also scan the QR code on the cover of the device to connect to the device's Wi-Fi.

Configuration Page:

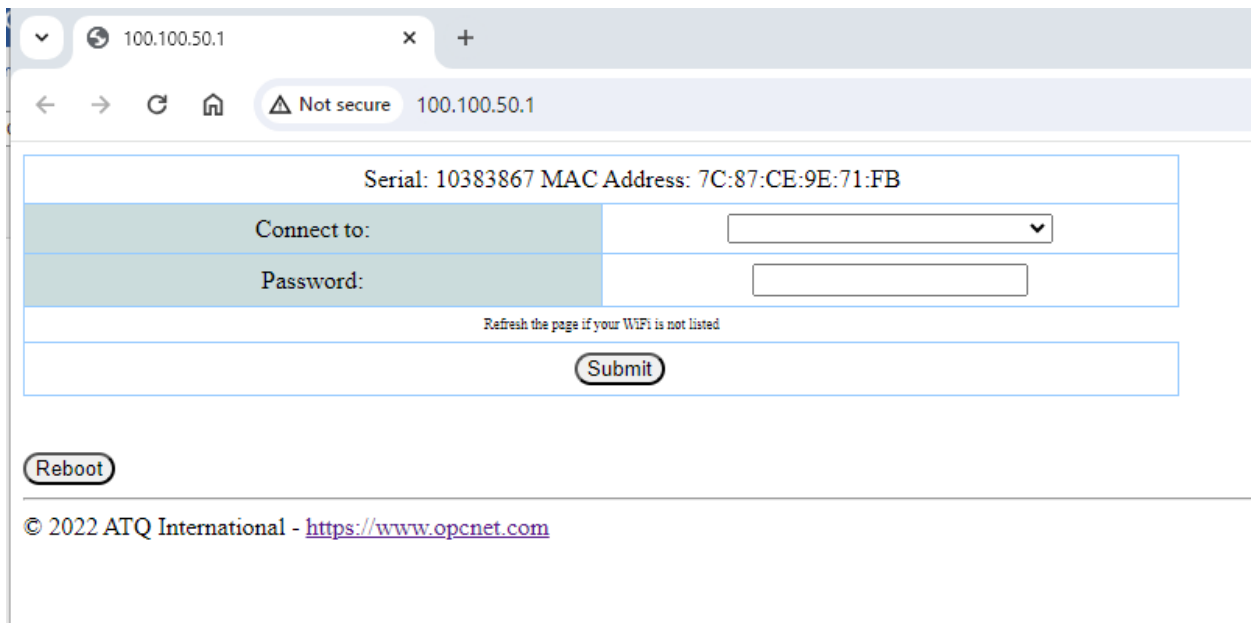

Select your router, enter the password for the router and click on SUBMIT.

When the device is connected, you can enable your Ethernet adapter (plug the cable into the port if you removed it)

